



HSW-802GS

8 x 10/100Base-Tx to 2x100/1000Base-X SFP Industrial Switch

The HSW-802GS is an 8 port Fast Ethernet 10/100Base-Tx to 2x 100/1000Base-X non-managed Industrial Ethernet Switch, hardened for extreme operating temperatures: -40 to +75 Celsius. Industrial Switches are housed in IP40 rated rugged metal housings designed to operate in difficult conditions, including mechanically and electrically extreme environments. All Industrial switches have strong surge protection (4kV~8kV) per port, depending on models and strict compliance with IEC and EN standards for industrial grade equipment.

Features

- DC power input block 10-60V
- Extreme operating temperature: -40 to +75 Celsius
- Rugged IP40 rated metal casing with DIN rail bracket
- Store and Forward switching mechanism
- Reversed power polarity protection
- Auto-Negotiation & Auto MDI/MDI-X on every RJ45 port
- Supports 8kV surge protection per port on all TP ports
- Supports IEEE 802.1Q Tag VLAN pass thru
- Redundant DC power inputs on every model

Specifications


IEEE Standard	IEEE 802.3 10Base-T, 802.3u 100Base-TX Ethernet 100Base-X Fast and 1000Base-X Gigabit Ethernet SFPs IEEE 802.3x Flow Control and Back Pressure	Operating Humidity	5% to 95% (Non-condensing)
Switch Architecture	Back-plane (Switching Fabric): 2.0 Gbps	Storage Temperature	-40 ~ 85°C
Data Processing	Store and Forward	Housing	Rugged Metal, IP40 Protection
Flow Control	IEEE 802.3x flow control, back pressure flow control	Dimensions	108 x 49 x 138mm (D x W x H)
Provides Broadcast Storm Protection	Present	Weight	0.55kg
MAC Address Table	4K	Installation Mounting	DIN Rail mounting or wall mounting
Packet Buffer Size	2Mbits	EMI	FCC Part 15 Subpart B Class A, CE EN 55022 Class A EN61000-6-4 – Emission for industrial environment
Ports	8 x RJ-45 10/1000Base-Tx ports 2 x 100/1000Base-X SFP slot 10/100Base-TX auto negotiation speed, Auto MDI/MDI-X function, Full/Half duplex	EMS	EN61000-6-2 – Immunity for Industrial environment EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (Magnetic Field) Level 3, Criteria A
Network Cable	10Base-T: 2-pair UTP/STP Cat.5 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)	Traffic control	NEMA-TS2
Protocols	CSMA/CD	Rail Traffic	EN50121-4
LED	Per unit: PWR (Green) LNK/ACT (Green - Fiber port status and activity) Per port: Link/Active (Green), Speed/100 (Yellow)	Shock	IEC 60068-2-27
Reverse Polarity Protection	Present	Freefall	IEC 60068-2-32
Overload Current Protection	Present	Vibration	IEC 60068-2-6
Power Supply	Redundant Dual DC 12/24/48V (9.6~60VDC) Input power (Removable Terminal Block)	MTBF	120,000Hrs
Power Consumption	<10W	Warranty	3 years
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC, NC		
Removable Terminal Block	Provide 2 Redundant power, Alarm relay contact, 6 Pin		
Operating Temperature	-40 ~ 75°C		

Application



HSW-802GS Fast Ethernet Switch Application

Dimensions

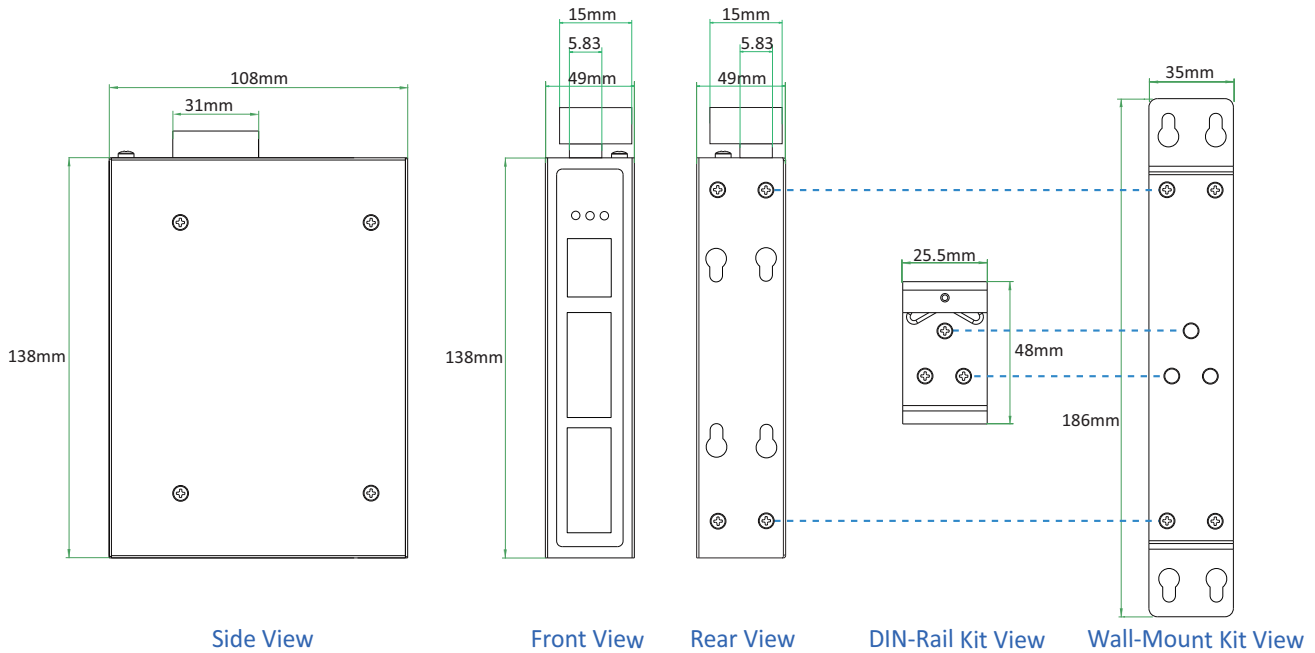

Ordering Information

Model Name	Description
HSW-802GS	8x 10/100Base-Tx to 2x 100/1000Base-X SFP non-managed Industrial switch extreme temp. (-40~75 Celsius)